





Product Rendering

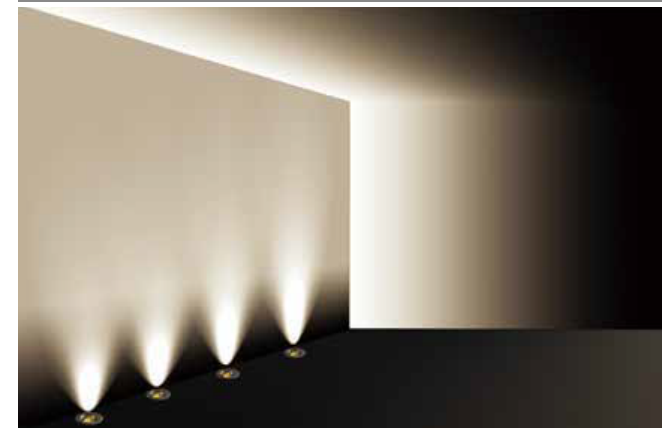

Product Size

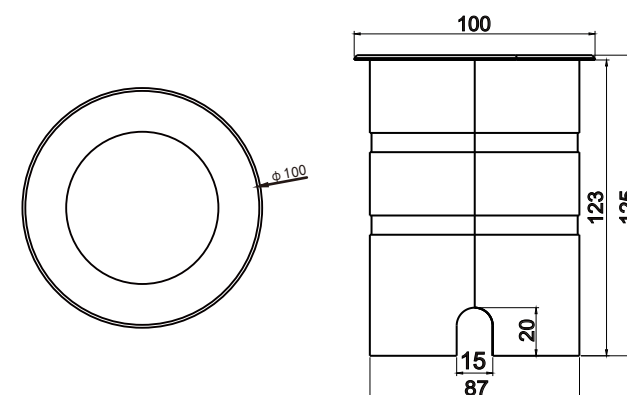

Application

Perfect anti-glare configuration with special lens buried lights. Suitable for installation in parks, roads and other public areas. These lights are drivable by vehicles with pneumatic tires.


Product description

AC85-265V/DC24V is versatile for diverse installation and wiring. 36° precision optics ensure even wall-wash distribution and assured lighting height. Multiple control mode: PWM/TRIAC/DALI, which adapts to diverse architectural lighting and dimming needs.

Light technique

COB light sources deliver a soft, uniformly diffused illumination. Aluminium housing, Clear safety glass, Protection class IP 67. Dust-tight and protection against water jets.

Luminaire data, and Installation manual as well as IES format for DIALux are available on the CREGINI website at www.cregini.com.



Lamp

Module connected wattage 10 W
Colour temperature 2700-6500K/RGBW
Operation temperature $t_a = -40^{\circ}\text{C} - 50^{\circ}\text{C}$
Ambient temperature $t_a \text{ max} = 50^{\circ}\text{C}$

Service life

LED psu: 50,000h
LED module: 60,000h (L80B50)
100,000h (L70B50)



Address: C T CORPORATION SYSTEM 28
LIBERTY STREET, NEW YORK, NY 10005



Email: sales@cregini.com
Website: www.cregini.com



Phone: +1(224)378-4648