





Product Rendering

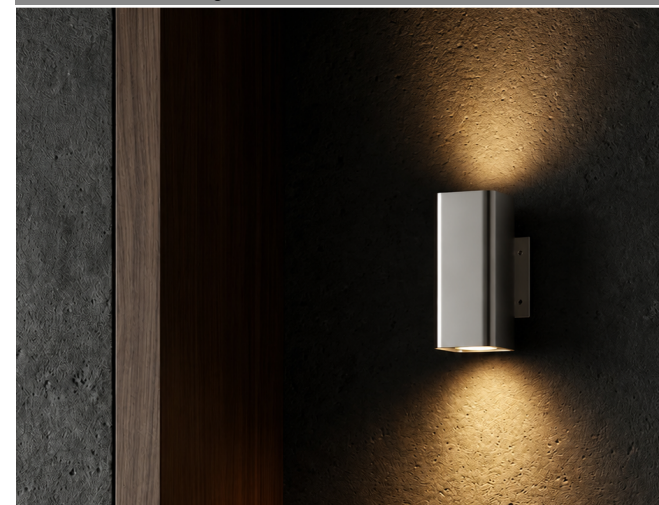

Product Size

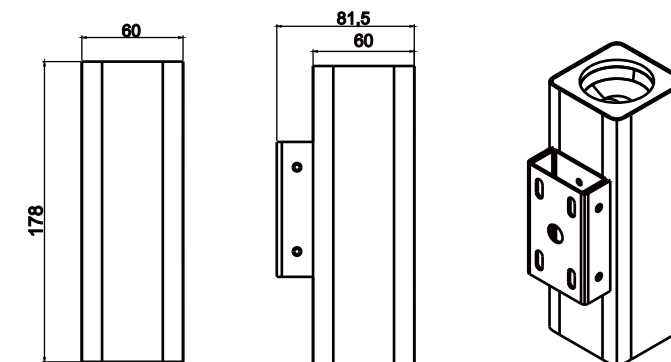

Application

CASTOR Wall luminaire- up&down light ,with integrated power supply equally well-suited for interior and exterior applications,the light emits upwards and downwards.

Product description

Luminaire made of aluminium alloy with 4mm thickness.
The whole serie, 4 sizes with different power options.
(2*2W/2*6W/2*10W/2*15W)
Clean, unibody design featuring a zero screw architecture.
Multiple control mode:DMX512/PWM/DALI.

Light technique

COB-driven, uniformly soft illumination(LENS Option:15/24/36/50°).
Wide-range voltage adaptation AC85-265V
Standards for enhanced stability.
Dust-tight and protection against water jets,IP66.


Luminaire data , and Installation manual as well as
IES format for DIALux are available on the
CREGINI website at www.cregini.com.

Lamp

Module connected wattage 2*2W
Colour temperature 2700-6500K
Operation temperature ta=-40°C-50 °C
Ambient temperature ta max=50 °C

Service life

LED psu: 50,000h
LED module: 60,000h (L80B50)
100,000h (L70B50)



Address

Address: C T CORPORATION SYSTEM 28
LIBERTY STREET, NEW YORK, NY 10005



Email

Email: sales@cregini.com
Website: www.cregini.com



Phone Call

Phone: +1(224)378-4648