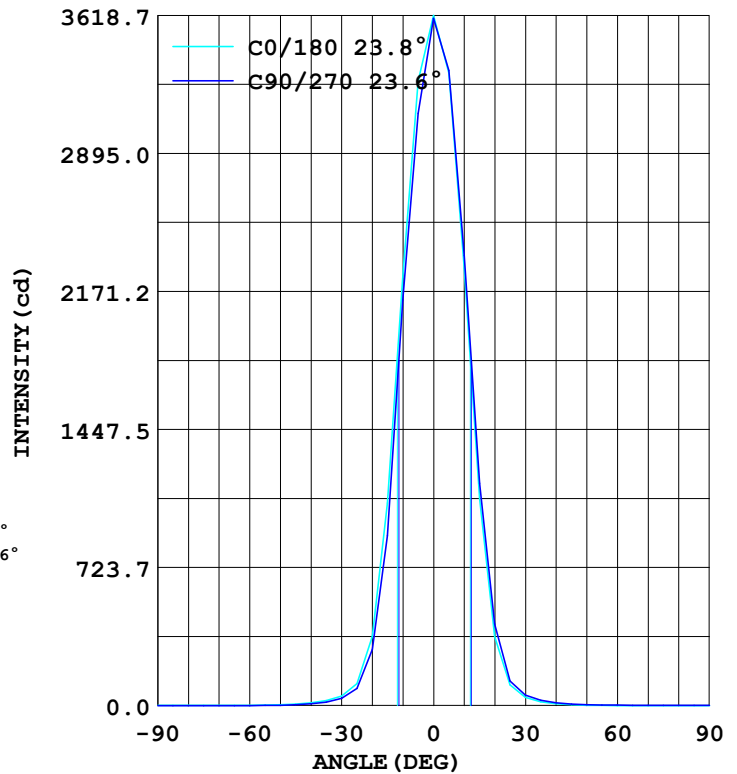
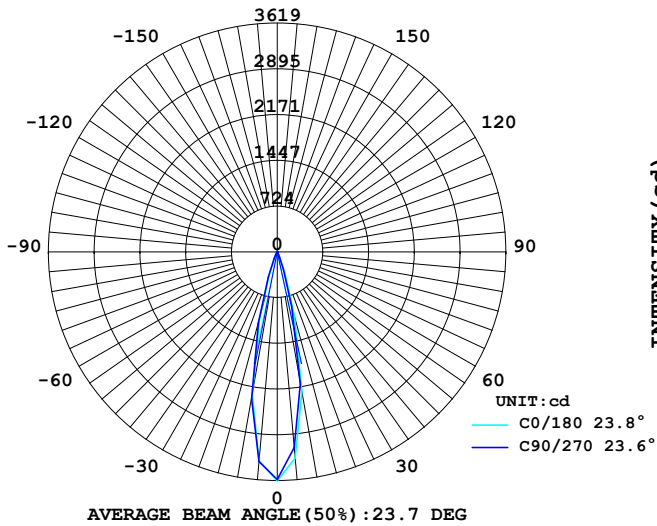


LUMINAIRE PHOTOMETRIC TEST REPORT

Report number:

MANUFACTURER:		
Address:		
NAME: LI615966	TYPE:	WEIGHT:
SPECIFICATION:	DIMENSION:	SERIAL No.:

DATA OF LAMP		Imax(cd)	3619	S/MH (C0/180)	0.39
MODEL		EFFICIENCY (%)	100.0	S/MH (C90/270)	0.37
NOMINAL POWER(W)	16	TOTAL FLUX(lm)	688.26	Voltage(V)	219.3
RATED VOLTAGE (V)	220	EFFICIENCY (lm/W)	41.6	Current(A)	0.125
NOMINAL FLUX(lm)	688.3	η up (%)	0.5	Power(W)	16.54
LAMPS QUANTITY	1	η down (%)	99.5	Power Factor (PF)	0.604
TEST VOLTAGE (V)	219.4	Effective Flux(lm)	591.9	EEI	0.000 (E)

LUMINOUS INTENSITY DISTRIBUTION
LUMINOUS INTENSITY DISTRIBUTION


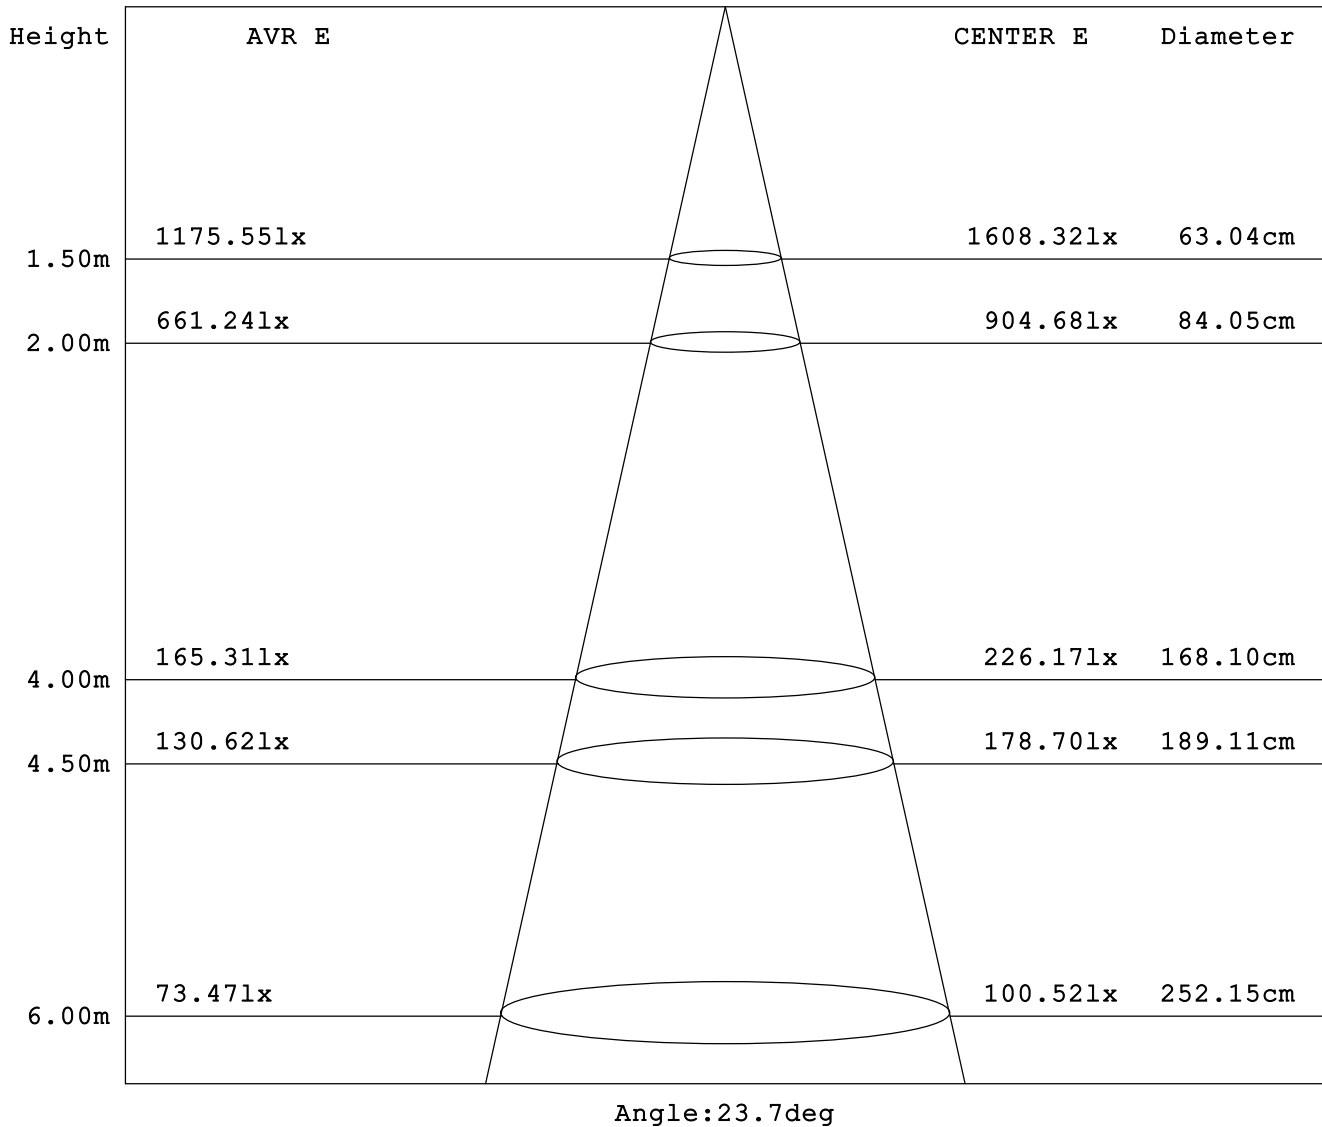
Test System:HopooColor HPG1800
Temperature:25.3DEG
Operators:
Test Date:2026年06月16日

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:8.300 m
Remarks:

AVERAGE AND CENTER E Figure

Report number:

MANUFACTURER:		
Address:		
NAME: LI615966	TYPE:	WEIGHT:
SPECIFICATION:	DIMENSION:	SERIAL No.:



Test System: HopooColor HPG1800
 Temperature: 25.3DEG
 Operators:
 Test Date: 2026年06月16日

Test Set: 5.0deg/s C-Gamma (TYPE C)
 Humidity: 65.0%
 Test Distance: 8.300 m
 Remarks:

ZONAL FLUX DIAGRAM

Report number:

MANUFACTURER:		
Address:		
NAME: LI615966	TYPE:	WEIGHT:
SPECIFICATION:	DIMENSION:	SERIAL No.:

γ	C0	C90	C180	C270					γ	Zone	total
10.0	2247	2126	2292	2360					0- 10	279.2	279.2
20.0	362.7	294.6	361.3	427.0					10- 20	312.5	591.8
30.0	49.25	37.33	42.57	54.21					20- 30	69.24	661.1
40.0	13.91	8.473	9.506	14.39					30- 40	15.79	676.9
50.0	4.202	1.377	1.377	4.408					40- 50	5.064	681.9
60.0	1.653	0	0	1.722					50- 60	1.469	683.4
70.0	0.827	0	0	0.827					60- 70	0.592	684.0
80.0	0.413	0	0	0.413					70- 80	0.327	684.3
90.0	0.138	0	0	0.138					80- 90	0.150	684.5
100.0	0	0	0	0					90-100	0.028	684.5
110.0	0	0	0	0					100-110	0	684.5
120.0	0	0	0	0					110-120	0	684.5
130.0	0	0	0	0					120-130	0	684.5
140.0	0.551	0.482	0	0					130-140	0.048	684.5
150.0	2.617	2.686	1.377	1.308					140-150	0.656	685.2
160.0	4.615	4.546	3.444	3.306					150-160	1.379	686.6
170.0	4.684	4.546	4.340	4.340					160-170	1.225	687.8
180.0	4.202	4.064	4.271	4.133					170-180	0.411	688.2
DEG	LUMINOUS INTENSITY:cd								UNIT:lm		

Test System:HopooColor HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:2026年06月16日

Test Set: 5.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:8.300 m
 Remarks:


LUMINANCE LIMITATION CURVES

Report number:

MANUFACTURER:		
Address:		
NAME: LI615966	TYPE:	WEIGHT:
SPECIFICATION:	DIMENSION:	SERIAL No.:

LUMINANCE LIMITATION CURVES

GLARE	CLASS	ILLUMINANCE (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

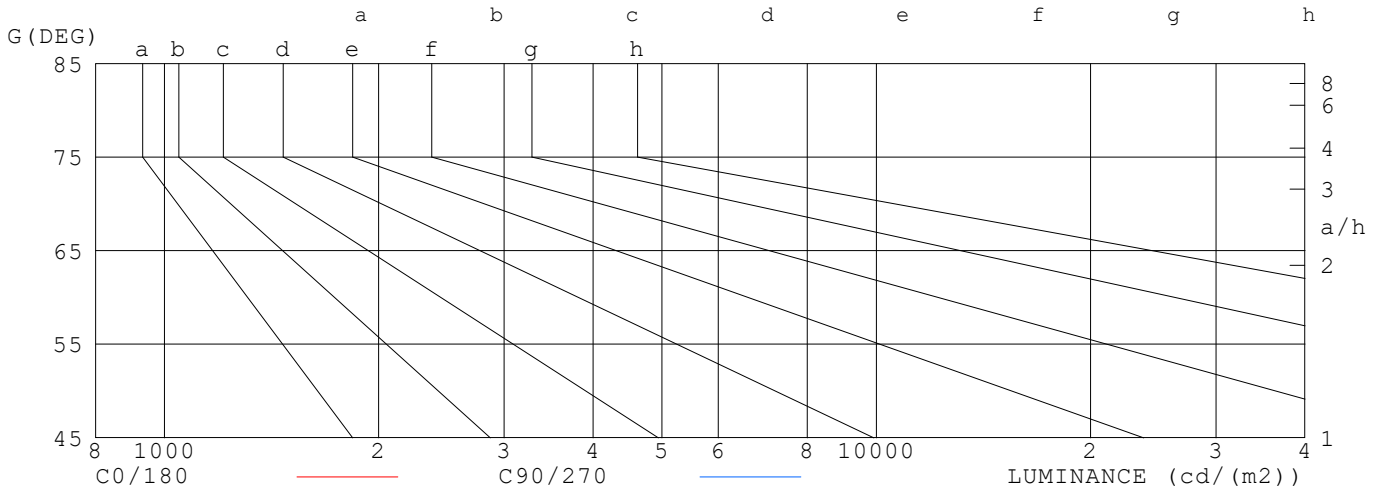

LUMINANCE cd/m2

G (DEG)	C0/180	C90/270
85	32	0
80	24	0
75	24	0
70	24	0
65	26	0
60	33	0
55	44	7
50	65	21
45	111	57

Test System:HopooColor HPG1800
Temperature:25.3DEG
Operators:
Test Date:2026年06月16日


Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:8.300 m
Remarks:

ISOCANDELA DIAGRAM

Report number:

MANUFACTURER:		
Address:		
NAME: LI615966	TYPE:	WEIGHT:
SPECIFICATION:	DIMENSION:	SERIAL No.:

UNIT: cd

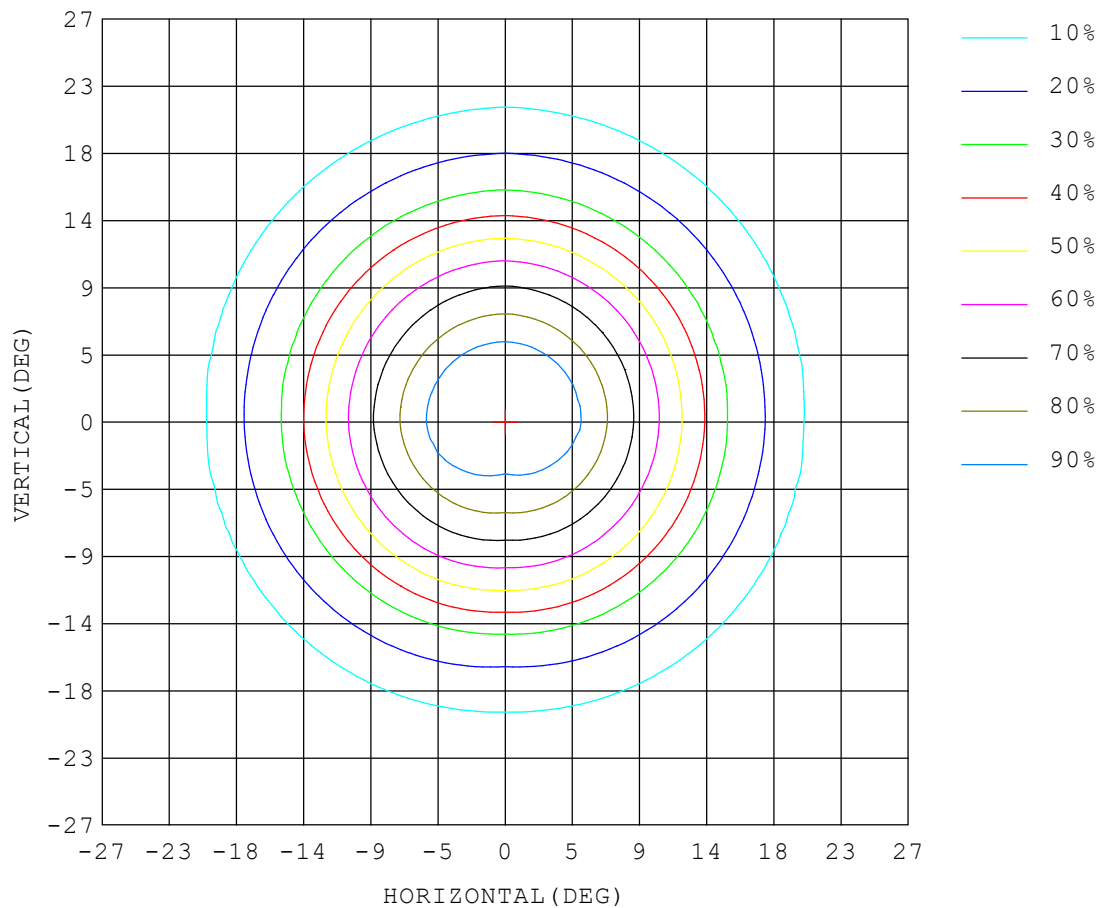


Test System:HopooColor HPG1800
Temperature:25.3DEG
Operators:
Test Date:2026年06月16日

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:8.300 m
Remarks:

ISOLUX DIAGRAM

Report number:

MANUFACTURER:		
Address:		
NAME: LI615966	TYPE:	WEIGHT:
SPECIFICATION:	DIMENSION:	SERIAL No.:

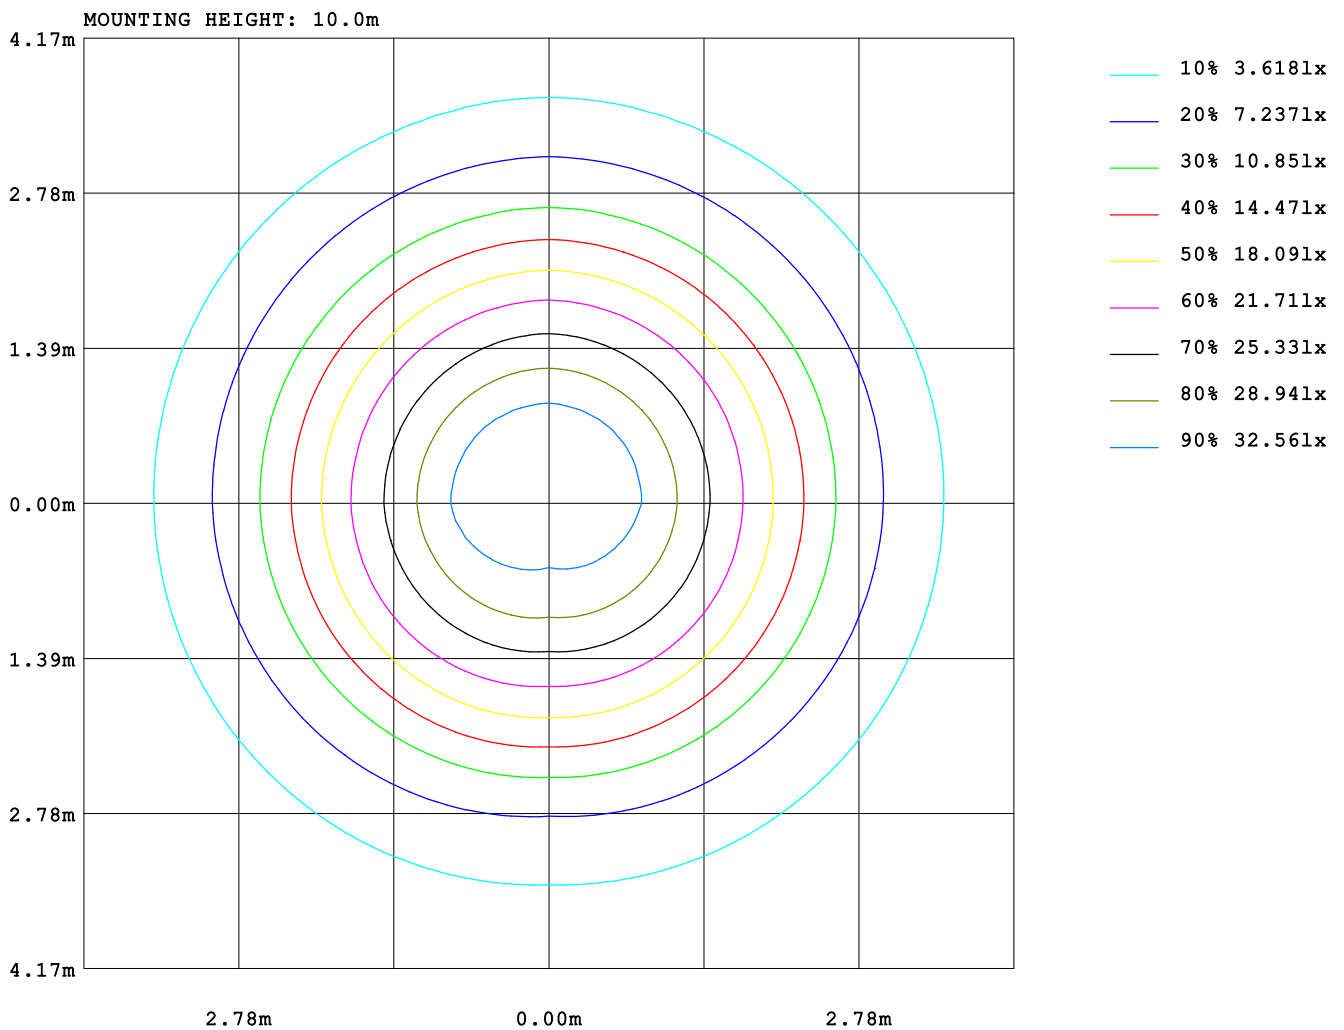

Test System:HopooColor HPG1800
Temperature:25.3DEG
Operators:
Test Date:2026年06月16日

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:8.300 m
Remarks:

AREA LUMINOUS FLUX

Report number:

MANUFACTURER:																			
Address:																			
NAME: LI615966										TYPE:					WEIGHT:				
SPECIFICATION:										DIMENSION:					SERIAL No.:				

		AREA FLUX DIAGRAM																	UNIT:lm			Φ t	Φ a
VERTICAL (DEG)	27																						
	24	0.06	0.08	0.10	0.14	0.19	0.24	0.28	0.31	0.34	0.34	0.32	0.28	0.24	0.19	0.14	0.11	0.09	0.06	3.51	0.00		
	21	0.08	0.10	0.15	0.22	0.29	0.40	0.55	0.67	0.75	0.75	0.67	0.55	0.40	0.29	0.22	0.16	0.11	0.08	6.43	0.00		
	18	0.10	0.14	0.22	0.32	0.53	0.78	1.00	1.22	1.38	1.38	1.22	1.00	0.78	0.54	0.33	0.23	0.15	0.11	11.4	6.22		
	15	0.12	0.20	0.31	0.57	0.88	1.31	1.87	2.30	2.54	2.53	2.29	1.86	1.31	0.89	0.58	0.32	0.21	0.13	20.2	16.5		
	12	0.16	0.26	0.50	0.85	1.44	2.23	2.96	3.65	4.09	4.08	3.64	2.94	2.22	1.43	0.86	0.51	0.27	0.17	32.3	29.1		
	9	0.20	0.35	0.70	1.23	2.17	3.20	4.44	5.45	6.01	6.00	5.42	4.41	3.17	2.15	1.23	0.71	0.36	0.21	47.4	44.7		
		0.23	0.46	0.87	1.72	2.83	4.36	5.90	7.04	7.67	7.66	7.00	5.84	4.31	2.79	1.70	0.87	0.47	0.24	62.0	59.5		
		0.25	0.55	1.04	2.08	3.44	5.28	6.95	8.30	9.04	9.02	8.25	6.88	5.21	3.38	2.05	1.04	0.56	0.26	73.6	71.2		
		0.27	0.59	1.14	2.26	3.80	5.76	7.52	8.99	9.53	9.50	8.91	7.42	5.66	3.73	2.22	1.14	0.60	0.28	79.4	77.0		
		0.26	0.58	1.13	2.22	3.75	5.71	7.45	8.88	9.39	9.36	8.79	7.34	5.61	3.68	2.18	1.12	0.59	0.28	78.3	76.1		
		0.24	0.53	0.99	1.99	3.30	5.12	6.74	7.99	8.59	8.57	7.94	6.66	5.04	3.24	1.96	0.99	0.54	0.25	70.7	68.2		
	-9	0.21	0.43	0.80	1.59	2.61	4.09	5.57	6.62	7.12	7.11	6.58	5.52	4.04	2.57	1.57	0.81	0.44	0.23	57.9	55.3		
	-12	0.18	0.32	0.63	1.09	1.94	2.85	4.02	4.95	5.42	5.41	4.93	3.99	2.82	1.92	1.09	0.63	0.33	0.19	42.7	39.9		
	-15	0.14	0.23	0.44	0.73	1.23	1.90	2.49	3.07	3.42	3.41	3.06	2.47	1.88	1.22	0.74	0.44	0.24	0.15	27.3	24.0		
	-18	0.11	0.18	0.27	0.48	0.72	1.06	1.50	1.81	1.94	1.94	1.80	1.49	1.06	0.73	0.49	0.28	0.19	0.12	16.1	11.9		
-21	0.08	0.12	0.19	0.27	0.43	0.61	0.76	0.91	1.00	1.00	0.91	0.76	0.61	0.43	0.27	0.19	0.13	0.09	8.75	1.84			
-24	0.06	0.09	0.12	0.18	0.23	0.31	0.41	0.49	0.52	0.53	0.49	0.41	0.31	0.23	0.18	0.13	0.09	0.07	4.86	0.00			
-27	0.05	0.06	0.08	0.11	0.14	0.18	0.21	0.23	0.24	0.25	0.23	0.21	0.19	0.15	0.11	0.09	0.07	0.05	2.66	0.00			
		-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)			6	9	12	15	18	21	24	27			
Φ t		2.78	5.27	9.68	18.0	29.9	45.4	60.6	72.9	79.0	78.9	72.5	60.0	44.9	29.6	17.9	9.78	5.44	2.98	688			
Φ a		0.00	0.00	3.36	14.0	26.8	42.5	58.1	70.5	76.6	76.4	70.0	57.6	42.0	26.4	13.8	3.35	0.00	0.00		592		

 Test System:HopooColor HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:2026年06月16日


 Test Set: 5.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:8.300 m
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Report number:

MANUFACTURER:															
Address:															
NAME: LI615966								TYPE:				WEIGHT:			
SPECIFICATION:								DIMENSION:				SERIAL No.:			

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.99
1.0	1.13	1.11	1.10	1.11	1.09	1.08	1.07	1.06	1.04	1.03	1.02	1.01	.99	.99	.98	.97
2.0	1.08	1.05	1.03	1.06	1.04	1.02	1.03	1.01	.99	1.00	.99	.97	.98	.96	.95	.94
3.0	1.04	1.00	.98	1.03	.99	.97	.99	.97	.95	.98	.96	.94	.96	.94	.92	.91
4.0	1.00	.96	.94	.99	.96	.93	.97	.94	.92	.95	.93	.91	.93	.91	.90	.89
5.0	.97	.93	.90	.96	.92	.90	.94	.91	.89	.93	.90	.88	.91	.89	.87	.86
6.0	.94	.90	.87	.93	.90	.87	.92	.89	.86	.91	.88	.86	.89	.87	.85	.84
7.0	.91	.87	.85	.91	.87	.84	.89	.86	.84	.88	.86	.83	.87	.85	.83	.82
8.0	.89	.85	.82	.88	.85	.82	.87	.84	.82	.86	.83	.81	.86	.83	.81	.80
9.0	.86	.83	.80	.86	.82	.80	.85	.82	.80	.84	.82	.79	.84	.81	.79	.78
10.0	.84	.81	.78	.84	.80	.78	.83	.80	.78	.83	.80	.78	.82	.79	.77	.77

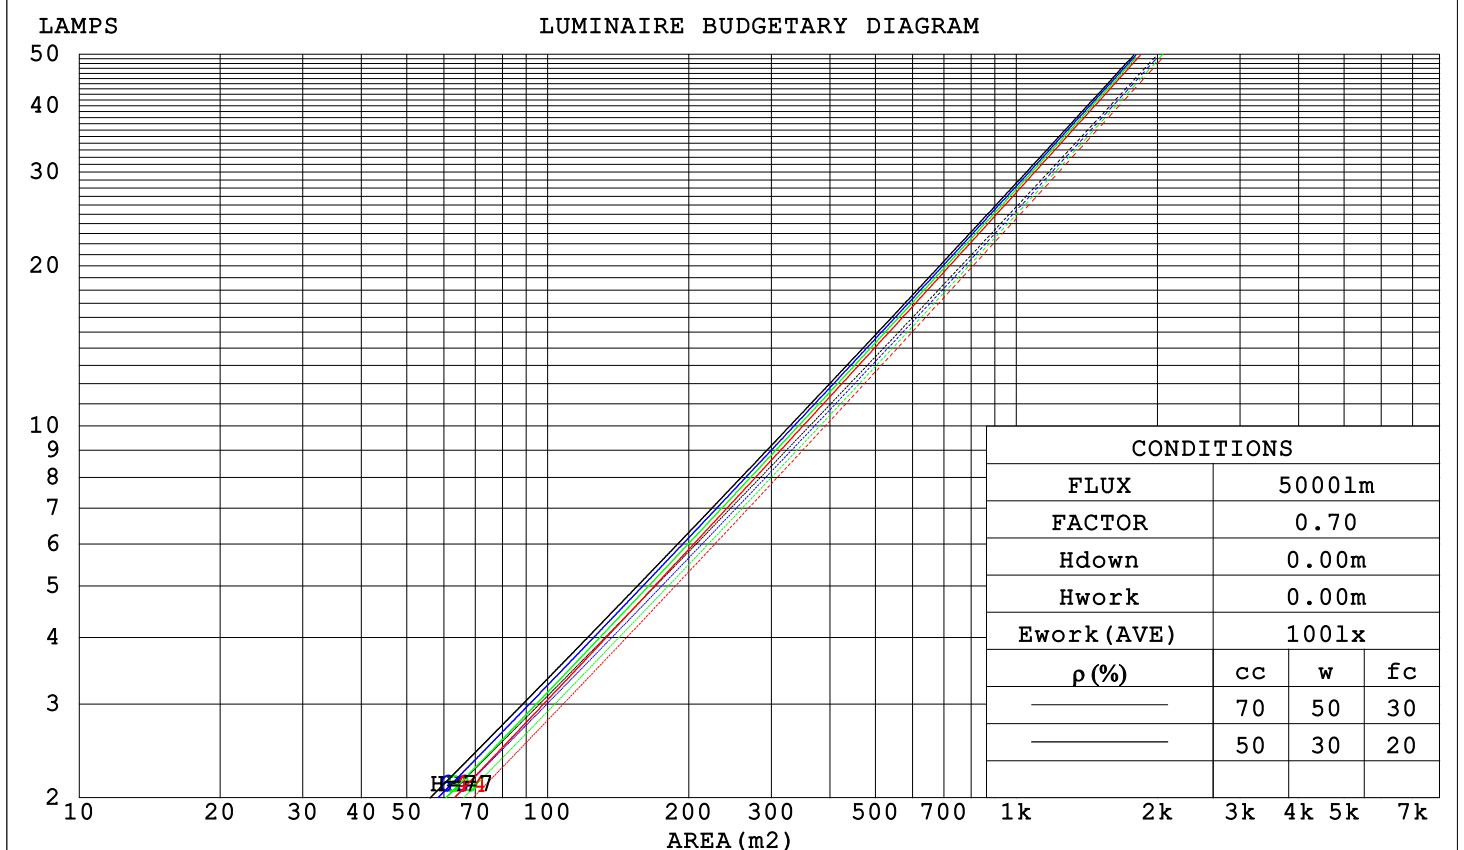
 Test System:HopooColor HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:2026年06月16日

 Test Set: 5.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:8.300 m
 Remarks:

WEC AND CCEC

Report number:

MANUFACTURER:															
Address:															
NAME: LI615966								TYPE:				WEIGHT:			
SPECIFICATION:								DIMENSION:				SERIAL No.:			

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.131	.075	.024	.125	.071	.023	.112	.064	.021	.100	.058	.019	.090	.052	.017	
2.0	.121	.066	.020	.115	.064	.020	.105	.058	.018	.095	.053	.017	.086	.049	.015	
3.0	.112	.060	.018	.108	.058	.017	.099	.054	.016	.091	.050	.015	.083	.046	.014	
4.0	.105	.054	.016	.101	.053	.016	.093	.050	.015	.087	.047	.014	.080	.044	.013	
5.0	.098	.050	.015	.095	.049	.014	.089	.046	.014	.083	.044	.013	.077	.041	.012	
6.0	.093	.047	.013	.090	.045	.013	.085	.043	.013	.080	.041	.012	.075	.039	.012	
7.0	.088	.043	.012	.085	.043	.012	.081	.041	.012	.076	.039	.011	.072	.038	.011	
8.0	.084	.041	.011	.081	.040	.011	.077	.039	.011	.074	.037	.011	.070	.036	.010	
9.0	.080	.039	.011	.078	.038	.011	.074	.037	.010	.071	.036	.010	.068	.034	.010	
10.0	.076	.037	.010	.075	.036	.010	.071	.035	.010	.068	.034	.010	.066	.033	.009	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.195	.195	.195	.166	.166	.166	.114	.114	.114	.065	.065	.065	.021	.021	.021	
1.0	.172	.162	.153	.147	.139	.131	.101	.096	.091	.058	.055	.053	.019	.018	.017	
2.0	.154	.137	.123	.132	.118	.106	.090	.082	.074	.052	.047	.043	.017	.015	.014	
3.0	.138	.117	.101	.119	.101	.087	.081	.070	.061	.047	.041	.036	.015	.013	.012	
4.0	.126	.102	.084	.108	.088	.073	.074	.061	.051	.043	.036	.030	.014	.012	.010	
5.0	.115	.090	.071	.099	.078	.062	.068	.054	.044	.039	.032	.026	.013	.010	.009	
6.0	.106	.080	.061	.091	.069	.053	.063	.048	.037	.036	.028	.022	.012	.009	.007	
7.0	.098	.071	.053	.084	.062	.046	.058	.043	.032	.034	.026	.019	.011	.008	.006	
8.0	.091	.064	.046	.078	.056	.040	.054	.039	.028	.032	.023	.017	.010	.008	.006	
9.0	.085	.059	.041	.074	.051	.035	.051	.036	.025	.030	.021	.015	.010	.007	.005	
10.0	.080	.054	.036	.069	.047	.032	.048	.033	.022	.028	.019	.013	.009	.006	.004	

Test System:HopooColor HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:2026年06月16日

Test Set: 5.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:8.300 m
 Remarks:

Uncorrected UGR Table

Report number:

MANUFACTURER:											
Address:											
NAME: LI615966					TYPE:			WEIGHT:			
SPECIFICATION:					DIMENSION:			SERIAL No.:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	3H	-8.0	-7.4	-7.8	-7.3	-7.1	-10.3	-9.7	-10.1	-9.5	-9.4
	4H	-7.9	-7.4	-7.7	-7.2	-7.0	-10.4	-9.8	-10.2	-9.7	-9.5
	6H	-7.9	-7.3	-7.6	-7.1	-6.9	-10.5	-9.9	-10.2	-9.7	-9.5
	8H	-7.8	-7.3	-7.5	-7.0	-6.8	-10.6	-10.1	-10.3	-9.8	-9.6
	12H	-7.7	-7.2	-7.4	-7.0	-6.7	-10.6	-10.1	-10.3	-9.9	-9.6
	12H	-7.7	-7.2	-7.4	-6.9	-6.7	-10.7	-10.2	-10.3	-9.9	-9.6
4H	2H	-8.2	-7.7	-7.9	-7.5	-7.2	-10.4	-9.9	-10.1	-9.6	-9.4
	3H	-8.1	-7.6	-7.8	-7.3	-7.1	-10.5	-10.1	-10.2	-9.8	-9.5
	4H	-8.0	-7.5	-7.6	-7.2	-6.9	-10.6	-10.2	-10.3	-9.9	-9.6
	6H	-7.8	-7.4	-7.5	-7.1	-6.8	-10.7	-10.3	-10.3	-10.0	-9.6
	8H	-7.7	-7.4	-7.3	-7.0	-6.6	-10.8	-10.4	-10.4	-10.0	-9.7
	12H	-7.6	-7.3	-7.2	-6.9	-6.5	-10.8	-10.5	-10.4	-10.1	-9.7
8H	4H	-8.1	-7.7	-7.7	-7.4	-7.0	-10.7	-10.3	-10.3	-10.0	-9.6
	6H	-7.9	-7.6	-7.5	-7.2	-6.8	-10.7	-10.4	-10.3	-10.0	-9.6
	8H	-7.8	-7.5	-7.3	-7.1	-6.6	-10.8	-10.5	-10.3	-10.1	-9.6
	12H	-7.6	-7.3	-7.1	-6.9	-6.4	-10.8	-10.6	-10.4	-10.2	-9.7
12H	4H	-8.1	-7.8	-7.7	-7.4	-7.0	-10.7	-10.4	-10.3	-10.0	-9.6
	6H	-7.9	-7.7	-7.5	-7.3	-6.8	-10.8	-10.5	-10.3	-10.1	-9.6
	8H	-7.8	-7.6	-7.3	-7.1	-6.6	-10.8	-10.6	-10.3	-10.1	-9.6
Variations with the observer position at spacings:											
S = 1.0H	+ 2.2 / - 2.9					+ 2.5 / - 7.1					
1.5H	+ 3.8 / - 3.4					+ 4.2 / - 6.4					
2.0H	+ 4.7 / - 2.2					+ 5.4 / - 3.9					

CIE Pub.117 Corrected 688.2 lm Total Lamp Luminous Flux.(8log(F/F0) = -1.3)

Test System:HopooColor HPG1800
Temperature:25.3DEG
Operators:
Test Date:2026年06月16日

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:8.300 m
Remarks:

UTILIZATION FACTORS TABLE

Report number:

MANUFACTURER:										
Address:										
NAME: LI615966					TYPE:			WEIGHT:		
SPECIFICATION:					DIMENSION:			SERIAL No.:		

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) k(RI) x RCR = 5									
k = 0.60	91	85	81	90	85	81	89	84	81	78
0.80	98	92	89	97	92	89	96	91	88	85
1.00	101	96	93	100	96	93	99	95	92	88
1.25	105	100	97	104	100	97	102	98	96	92
1.50	107	103	100	106	102	100	104	101	98	94
2.00	110	106	103	108	105	102	105	103	100	95
2.50	111	108	105	109	106	104	106	104	102	96
3.00	112	109	107	111	108	106	107	105	103	97
4.00	114	112	110	112	110	108	109	107	106	98
5.00	115	113	112	113	112	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004										
Suspended										
SHRNOM = 1.25										


Test System: HopooColor HPG1800
 Temperature: 25.3DEG
 Operators:
 Test Date: 2026年06月16日

Test Set: 5.0deg/s C-Gamma (TYPE C)
 Humidity: 65.0%
 Test Distance: 8.300 m
 Remarks:

ISOCANDELA DIAGRAM

Report number:

MANUFACTURER:		
Address:		
NAME: LI615966	TYPE:	WEIGHT:
SPECIFICATION:	DIMENSION:	SERIAL No.:

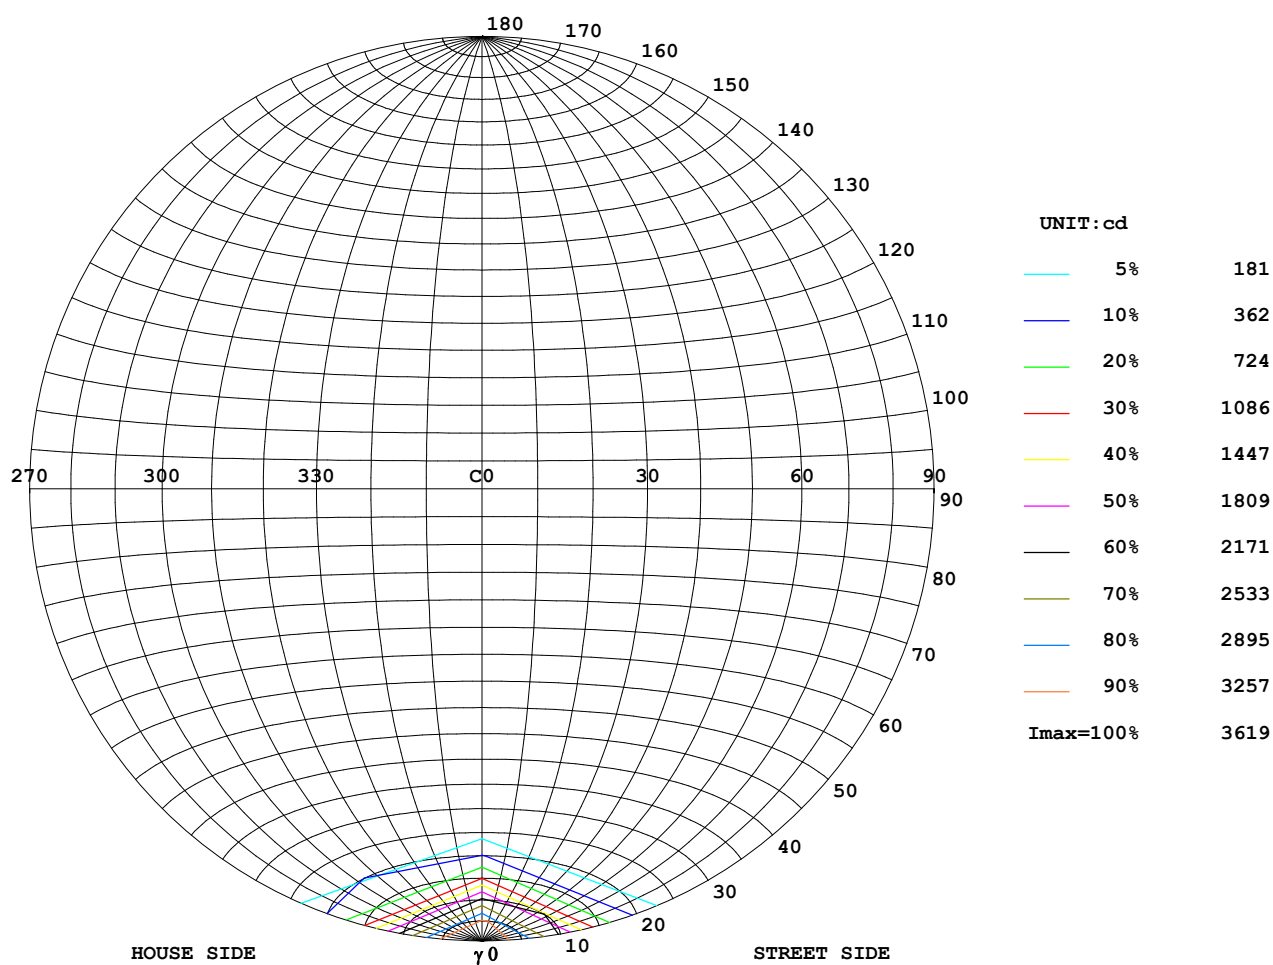

Test System: HopooColor HPG1800
Temperature: 25.3 DEG
Operators:
Test Date: 2026年06月16日



Test Set: 5.0 deg/s C-Gamma (TYPE C)
Humidity: 65.0%
Test Distance: 8.300 m
Remarks:

ISOLUX DIAGRAM

Report number:

MANUFACTURER:		
Address:		
NAME: LI615966	TYPE:	WEIGHT:
SPECIFICATION:	DIMENSION:	SERIAL No.:

ILLUMINANCE AT MH=10 m, Enadir = 36.19 lx

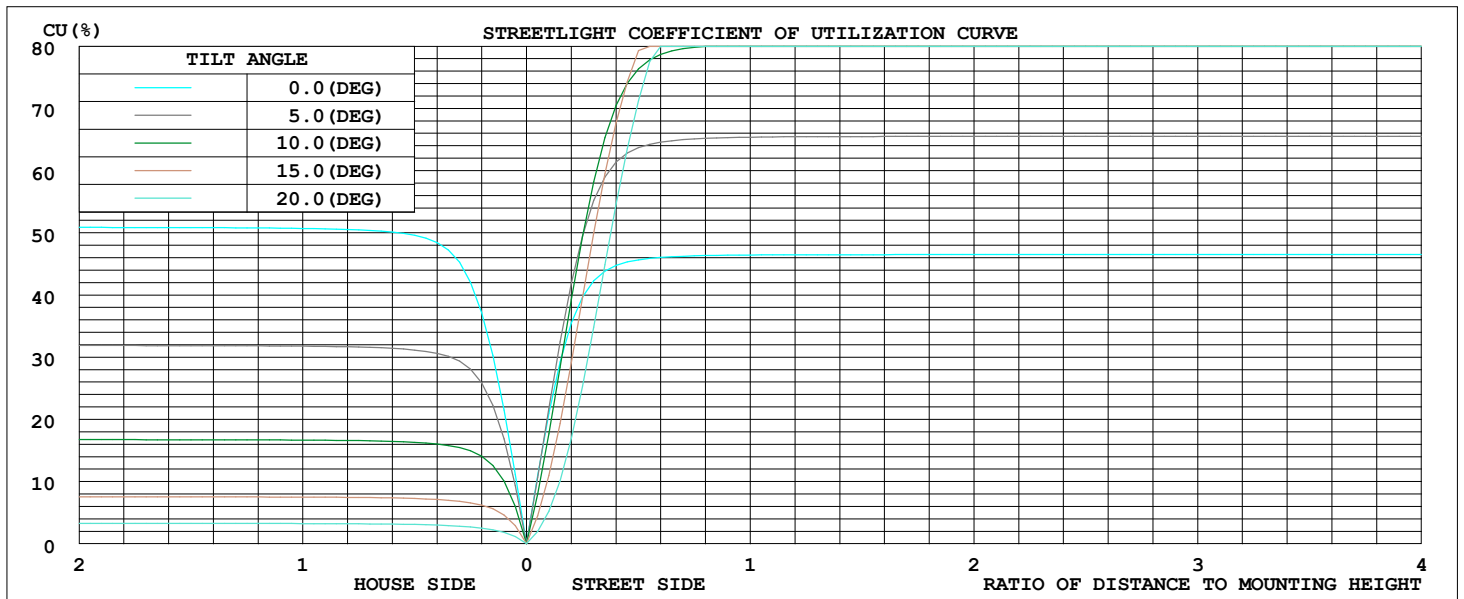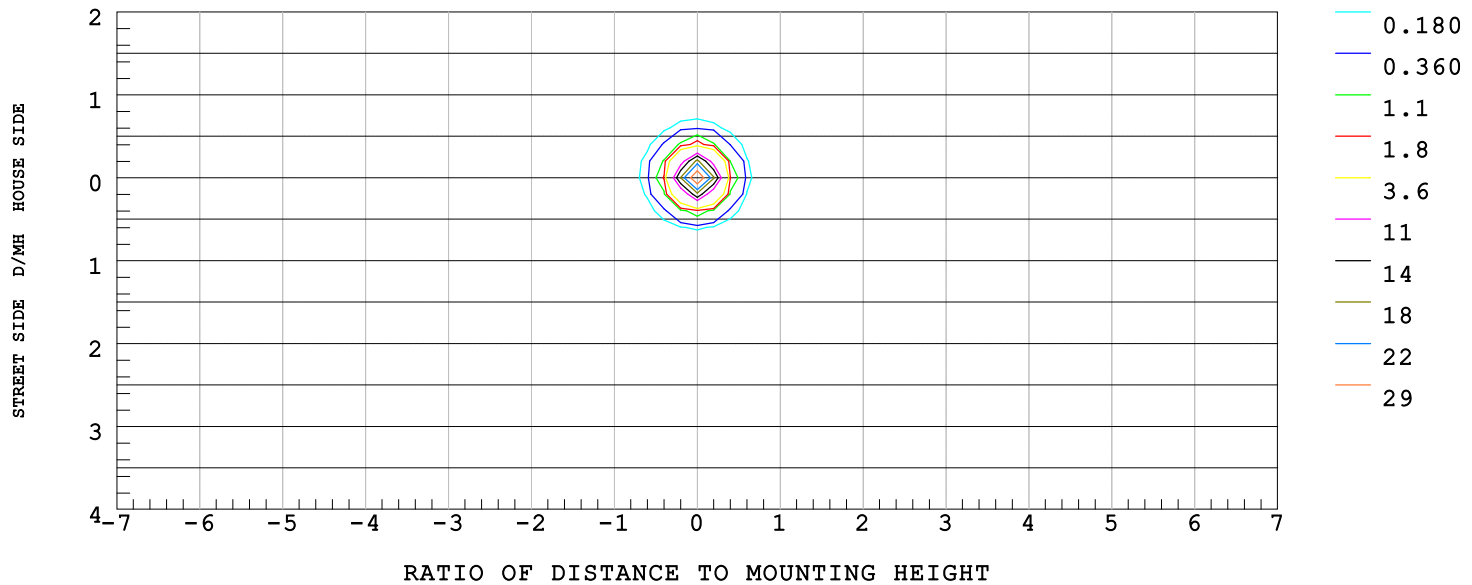


Test System:HopooColor HPG1800
Temperature:25.3DEG
Operators:
Test Date:2026年06月16日

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:8.300 m
Remarks:

ISOCANDELA DIAGRAM

Report number:

MANUFACTURER:		
Address:		
NAME: LI615966	TYPE:	WEIGHT:
SPECIFICATION:	DIMENSION:	SERIAL No.:

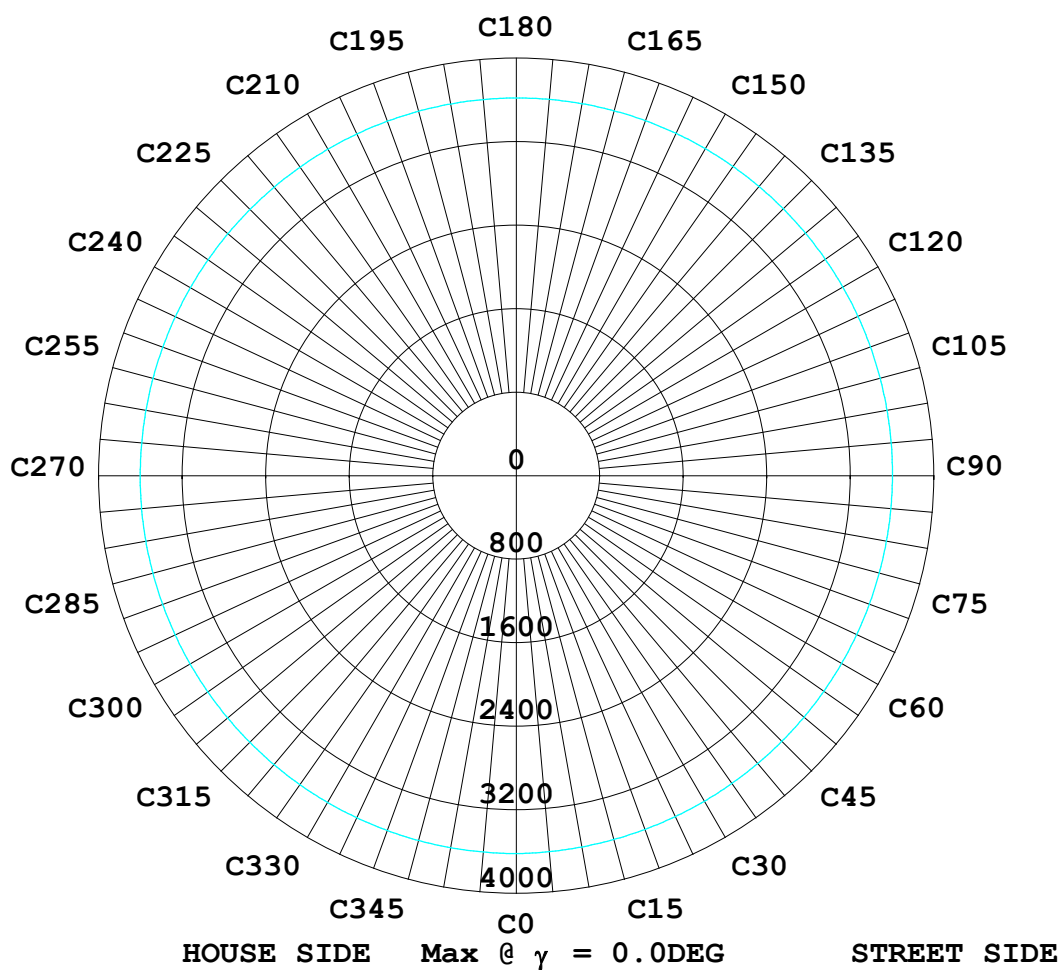

Test System:HopooColor HPG1800
Temperature:25.3DEG
Operators:
Test Date:2026年06月16日

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:8.300 m
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Report number:

MANUFACTURER:		
Address:		
NAME: LI615966	TYPE:	WEIGHT:
SPECIFICATION:	DIMENSION:	SERIAL No.:

UNIT: cd

C (DEG)				
γ (DEG)	0	90	180	270
0.0	3619	3603	3619	3603
5.0	3274	3105	3316	3330
10.0	2247	2126	2292	2360
15.0	1062	891	1085	1166
20.0	363	295	361	427
25.0	115	89.7	109	128
30.0	49.2	37.3	42.5	54.2
35.0	25.7	17.7	19.8	27.2
40.0	13.9	8.47	9.50	14.3
45.0	7.85	3.99	4.34	8.06
50.0	4.20	1.37	1.37	4.40
55.0	2.54	0.41	0.28	2.61
60.0	1.65	0.00	0.00	1.72
65.0	1.10	0.00	0.00	1.17
70.0	0.83	0.00	0.00	0.83
75.0	0.62	0.00	0.00	0.62
80.0	0.41	0.00	0.00	0.41
85.0	0.28	0.00	0.00	0.28
90.0	0.14	0.00	0.00	0.14
95.0	0.00	0.00	0.00	0.07
100.0	0.00	0.00	0.00	0.00
105.0	0.00	0.00	0.00	0.00
110.0	0.00	0.00	0.00	0.00
115.0	0.00	0.00	0.00	0.00
120.0	0.00	0.00	0.00	0.00
125.0	0.00	0.00	0.00	0.00
130.0	0.00	0.00	0.00	0.00
135.0	0.00	0.00	0.00	0.00
140.0	0.55	0.48	0.00	0.00
145.0	1.51	1.51	0.55	0.48
150.0	2.61	2.68	1.37	1.30
155.0	3.78	3.78	2.41	2.27
160.0	4.61	4.54	3.44	3.30
165.0	4.89	4.75	4.13	4.06
170.0	4.68	4.54	4.34	4.34
175.0	4.34	4.13	4.20	4.20
180.0	4.20	4.06	4.27	4.13

Test System:HopooColor HPG1800
Temperature:25.3DEG
Operators:
Test Date:2026年06月16日

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:8.300 m
Remarks: