




Product Rendering



Product Size

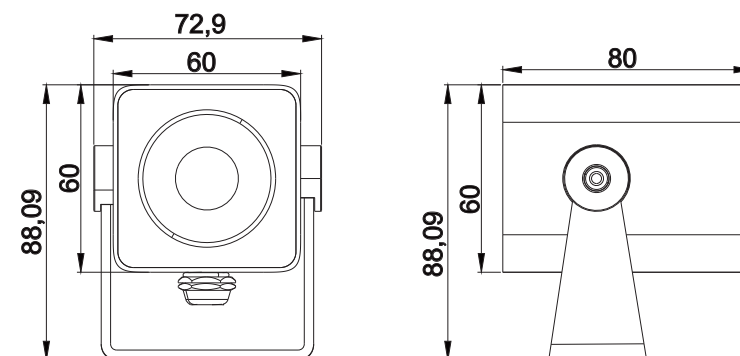

Application

CUBE Flood lights with an adjustable mounting bracket for permanent installation on a wall, under a ceiling or on a base.
Customized brackets are also available for the project to ensure the target design outcome is met.


Product description

Tiny, refined housing with a choice of wattage configurations(2-10W).
AC85-265V/DC24V is versatile for diverse installation and wiring setups.
Customizable finish can seamlessly match architectural façades.
Multiple control mode:PWM/TRIAC/DALI,which adapts to diverse architectural lighting and dimming needs.

Light technique

COB light sources deliver a soft, uniformly diffused illumination.
Cast aluminium housing,Clear safety glass, Protection class IP 66.
Dust-tight and protection against water jets.

Luminaire data , and Installation manual as well as IES format for DIALux are available on the CREGINI website at www.cregini.com.



Lamp

Module connected wattage 15W
Colour temperature 2700-6500K
Operation temperature $t_a = -40^{\circ}\text{C} - 50^{\circ}\text{C}$
Ambient temperature $t_a \text{ max} = 50^{\circ}\text{C}$

Service life

LED psu: 50,000h
LED module: 60,000h (L80B50)
100,000h (L70B50)