




Product Rendering



Product Size

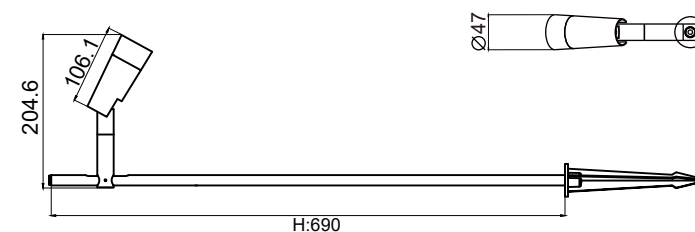

Application

ECHO bollard light ,one light, infinite possibilities.
Whether staked into the earth, mounted on a facade,
or placed upon the lawn, it redefines adaptability
with understated grace.


Product description

Dual 90°adjustable lights on one pole-tailor the beam
direction to your preference.
Adjustable fixture count for optimal illumination effects
Round base / Spike ,and height-customizable pole available.
Bespoke finishes available for seamless integration
with any environment.

Light technique

Power range 7W ,2700-6500K available
DC24V&AC85-265 version,with universal power input design
Multiple control mode:PWM/TRIAC/DALI Dimming
Dust-tight and protection against water jets, IP65.

Luminaire data , and Installation manual as well as IES format
for DIALux are available on the
CREGINI website at www.cregini.com.



Lamp

Module connected wattage 7W
Colour temperature 2700-6500K
Operation temperature $t_a = -40^{\circ}\text{C} - 50^{\circ}\text{C}$
Ambient temperature $t_a \text{ max} = 50^{\circ}\text{C}$

Service life

LED psu: 50,000h
LED module: 60,000h (L80B50)
100,000h (L70B50)



Address

Address: C T CORPORATION SYSTEM 28
LIBERTY STREET, NEW YORK, NY 10005



Email

Email: sales@cregini.com
Website: www.cregini.com



Phone Call

Phone: +1(224)378-4648