




Product Rendering



Product Size

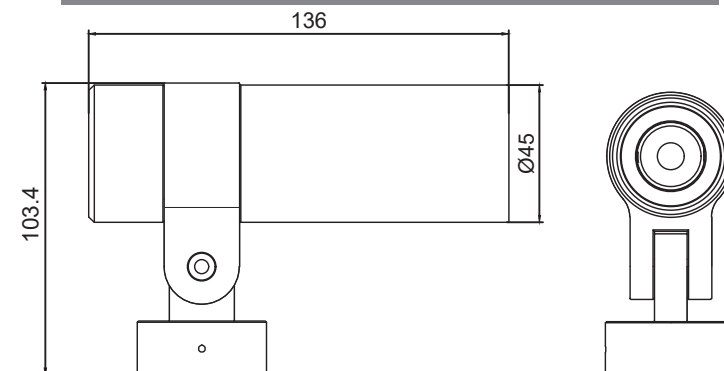

Application

EROS Flood lights with an adjustable mounting base for permanent installation on a wall, under a ceiling or on a base. Customized brackets are also available for the project to ensure the target design outcome is met.

Product description

Tiny, refined housing with a choice of wattage configurations(5-15W). AC85-265V/DC24V is versatile for diverse installation and wiring setups. Recessed lens optics: peak efficacy, minimal glare. DMX/PWM/TRIAC/DALI control –versatile for any architectural dimming scenario.

Light technique

COB light sources deliver a soft, uniformly diffused illumination. Cast aluminium housing, Clear safety glass, Protection class IP 67. Dust-tight and protection against water jets.


Luminaire data , and Installation manual as well as IES format for DIALux are available on the CREGINI website at www.cregini.com.

Lamp

Module connected wattage 10W
Colour temperature 2700-6500K/RGBW
Operation temperature $t_a = -40^{\circ}\text{C} - 50^{\circ}\text{C}$
Ambient temperature $t_a \text{ max} = 50^{\circ}\text{C}$

Service life

LED psu: 50,000h
LED module: 60,000h (L80B50)
100,000h (L70B50)



Address

Address: C T CORPORATION SYSTEM 28
LIBERTY STREET, NEW YORK, NY 10005



Email

Email: sales@cregini.com
Website: www.cregini.com



Phone Call

Phone: +1(224)378-4648