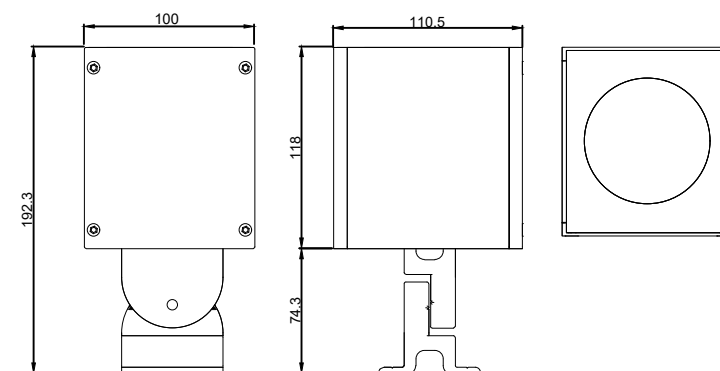


Application

FOREST Floodlights with an adjustable mounting bracket for permanent installation on a wall, under a ceiling or on a base. Customized brackets are also available for the project to ensure the target design outcome is met.

Product description:

Various length and LED configurations yield a diverse array of wattages offering superior adaptability to project requirements. The specific 36° lens ensures a seamless wall-wash finish, while adjustable brackets enable effortless, flexible installation

Light technique

Symmetrical wide beam light distribution.
Cast aluminium housing, Clear safety glass,
Protection class IP 66 / IK08.

Dust-tight and protection against water jets.
Compatible with multiple dimming methods.

Luminaire data , and Installation manual as well as IES format for DIALux are available on the CREGINI website at www.cregini.com.

Lamp

Module connected wattage 12 W
Colour temperature 2700-6500K
Operation temperature $t_a = -40^{\circ}\text{C} - 50^{\circ}\text{C}$
Ambient temperature $t_a \text{ max} = 50^{\circ}\text{C}$

Service life

LED psu: 50,000h
LED module: 60,000h (L80B50)
100,000h (L70B50) 50 °C



Address

Address: C T CORPORATION SYSTEM 28
LIBERTY STREET, NEW YORK, NY 10005



Email

Email: Sales@cregini.com
Website: www.cregini.com



Phone Call

Phone: +1(224)378-4648