

Product Rendering



Product Size

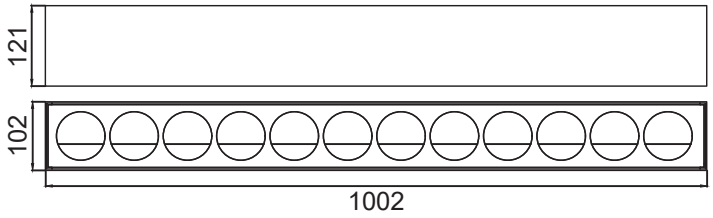

Application

Perfect anti-glare configuration with special lens buried lights.
Suitable for installation in parks, roads and other public areas.
These lights are drivable by vehicles with pneumatic tires.

Product description:

50°precision optics ensure even wall-wash distribution and assured lighting height.
Various lengths and LED options provide flexible wattage for diverse project needs.
Control: DMX/PWM/TRIAC/DALI for versatile architectural dimming.

Light technique

COB light sources deliver a soft, uniformly diffused illumination.
AC85-265V/DC24V is versatile for diverse installation and wiring setups.
Aluminium housing,Clear safety glass, Protection class IP 67.

Luminaire data , and Installation manual as well as IES format for DIALux are available on the CREGINI website at www.cregini.com.

IK08 IP67 CE CB SAA

Lamp

Module connected wattage 144 W
Colour temperature 2700-6500K/RGBW
Operation temperature ta=-40°C-50 °C
Ambient temperature ta max=50 °C

Service life

LED psu: 50,000h
LED module: 60,000h (L80B50)
100,000h (L70B50)

Address
Address: C T CORPORATION SYSTEM 28
LIBERTY STREET, NEW YORK, NY 10005

Email
Email: sales@cregini.com
Website: www.cregini.com

Phone Call
Phone: +1(224)378-4648