




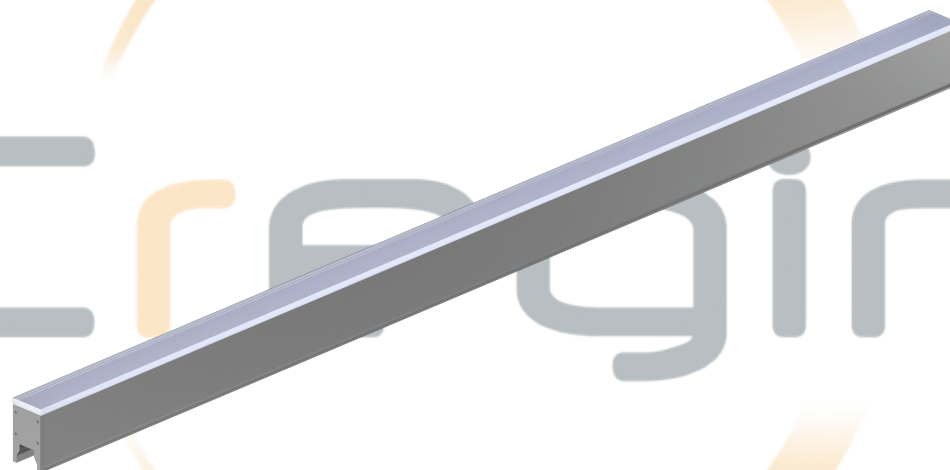

Product Rendering

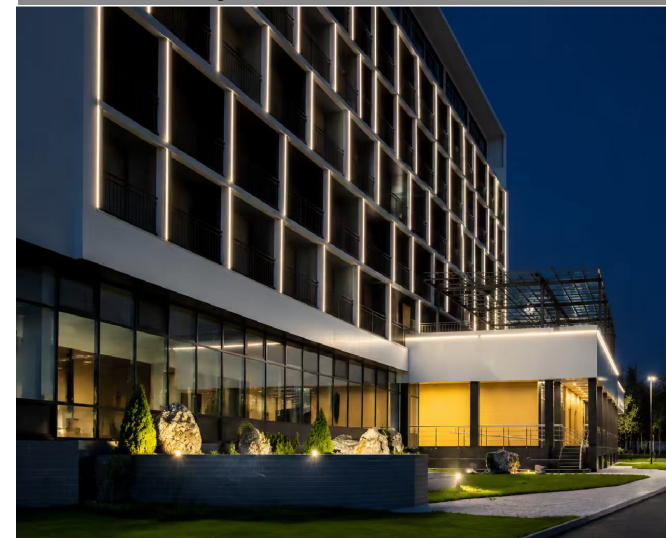

Product Size

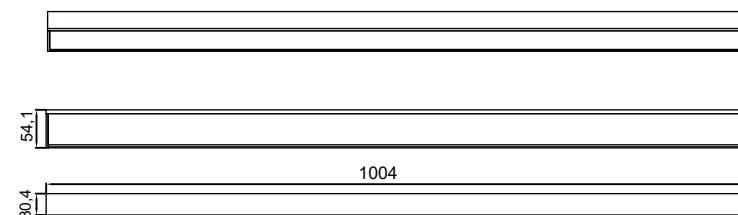

### Application

LITE linear light with a option of 3 kinds of brackets for permanent installation-ceiling, wall or surface-mounted.

It consists of a body and installation brackets

### Product description

With PMMA cover,3 colors option-Milky/Half-Transparent/Gray  
Seamlessly match the building facade, fully concealing the fixture  
UV-stabilized with over 90% light transmittance  
Delivering softened, uniform illumination that minimizes glare  
DC24V with IP66 rating, compliant with stringent stability standards.


### Light technique

Power range 12-15W ,MONO color/RGB/RGBW/RGBA available  
Multiple control mode:DMX512/PWM/TRIAC/DALI Dimming  
Center-exit waterproof connectors, reduced voltage drop, extended daisy-chain capacity

Luminaire data , and Installation manual as well as IES format for DIALux are available on the CREGINI website at [www.cregini.com](http://www.cregini.com).

### Lamp

Module connected wattage 12W/15W  
Colour temperature 2700-6500K/RGBW  
Operation temperature ta=-40°C-50 °C  
Ambient temperature ta max=50 °C



### Service life

LED psu: 50,000h  
LED module: 60,000h (L80B50)  
100,000h (L70B50)



Address

Address: C T CORPORATION SYSTEM 28  
LIBERTY STREET, NEW YORK, NY 10005



Email

Email: [sales@cregini.com](mailto:sales@cregini.com)  
Website: [www.cregini.com](http://www.cregini.com)



Phone Call

Phone: +1(224)378-4648