




Product Rendering



Product Size

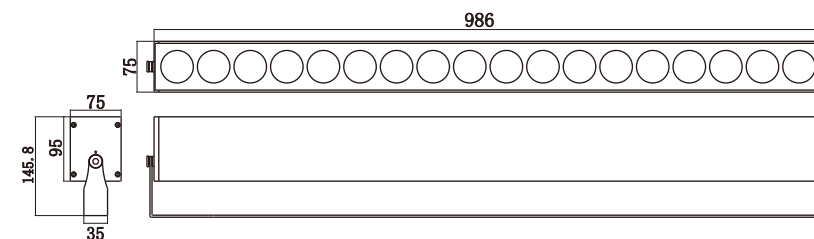

Application

LUMOS Floodlights with an adjustable mounting bracket for permanent installation on a wall, under a ceiling or on a base. Customized brackets are also available for the project to ensure the target design outcome is met.

Product description


Various length and LED configurations yield a diverse array of wattages offering superior adaptability to project requirements. The specific 50° lens ensures a seamless wall-wash finish, while adjustable brackets enable effortless, flexible installation

Light technique

Symmetrical wide beam light distribution.
Cast aluminium housing, Clear safety glass,
Protection class IP 67 / IK08.

Dust-tight and protection against water jets.
Compatible with multiple dimming methods.

Luminaire data, and Installation manual as well as IES format for DIALux are available on the CREGINI website at www.cregini.com.



Lamp

Module connected wattage 120W
Colour temperature 2700-6500K/RGBW
Operation temperature $t_a = -40^{\circ}\text{C} - 50^{\circ}\text{C}$
Ambient temperature $t_a \text{ max} = 50^{\circ}\text{C}$

Service life

LED psu: 50,000h
LED module: 60,000h (L80B50)
100,000h (L70B50)



Address

Address: C T CORPORATION SYSTEM 28
LIBERTY STREET, NEW YORK, NY 10005



Email

Email: sales@cregini.com
Website: www.cregini.com



Phone Call

Phone: +1(224)378-4648