




Application



Product Size

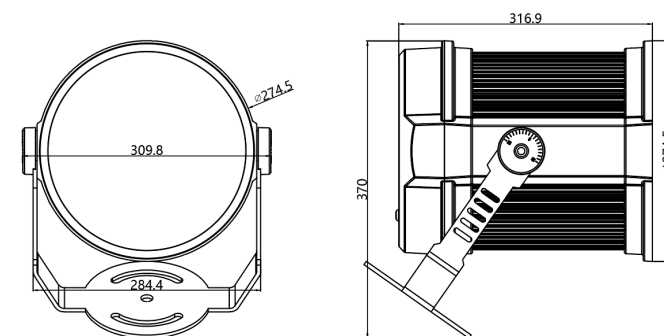

Application

Mirage Floodlights with an adjustable mounting bracket for permanent installation, on a wall, under a ceiling or on a base. Customized brackets are also available for the projects.


Please note:

Wide 150W-500W wattage range for diverse applications. Forget complex wiring, costly control panels, powered by Bluetooth, compatible to the Casambi-wireless control system and other control mode: DMX512/PWM/DALI DIMMING. 4-in-1 and 6-in-1 solutions deliver enhanced performance with both powerful and soft lighting effects.

Light technique

Selectable narrow or wide beam angle for desired coverage. Cylindrical cooling-pin structure for efficient heat dissipation. Cast aluminium housing, Protection class IP 66. Dust-tight and protection against water jets. Compatible with multiple dimming methods.

Luminaire data, and Installation manual as well as IES format for DIALux are available on the CREGINI website at www.cregini.com.



Lamp

Module connected wattage
200 W(MONO COLOR)
300 W(RGBW/RGBW+A+P)
Colour temperature 2700-6500K/RGBW/RGBW+A+P
Operation temperature $t_a = -40^{\circ}\text{C} - 50^{\circ}\text{C}$
Ambient temperature $t_a \text{ max} = 50^{\circ}\text{C}$

Service life

LED psu: 50,000h
LED module: 60,000h (L80B50)
100,000h (L70B50)