




Product Rendering



Product Size

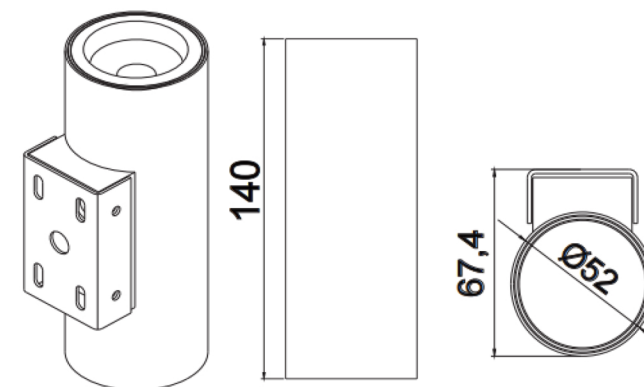

Application

POLLUX Wall luminaire, up&down light, with integrated power supply equally well-suited for interior and exterior applications, the light emits upwards and downwards.


Product description

Luminaire made of aluminium alloy with 4mm thickness.
The whole serie, 4 sizes with different power options.
(2*2W/2*6W/2*10W/2*15W)
Clean, unibody design featuring a zero screw architecture.
Multiple control mode: DMX512/PWM/DALI.

Light technique

COB-driven, uniformly soft illumination (LENS Option: 15/24/36/50°).
Wide-range voltage adaptation AC85-265V
Standards for enhanced stability.
Dust-tight and protection against water jets, IP66.

Luminaire data, and Installation manual as well as IES format for DIALux are available on the CREGINI website at www.cregini.com.



Lamp

Module connected wattage 2*10W
Colour temperature 2700-6500K
Operation temperature $t_a = -40^{\circ}\text{C} - 50^{\circ}\text{C}$
Ambient temperature $t_a \text{ max} = 50^{\circ}\text{C}$

Service life

LED psu: 50,000h
LED module: 60,000h (L80B50)
100,000h (L70B50)



Address

Address: C T CORPORATION SYSTEM 28
LIBERTY STREET, NEW YORK, NY 10005



Email

Email: sales@cregini.com
Website: www.cregini.com



Phone Call

Phone: +1(224)378-4648