



CASAMBI



Product Rendering

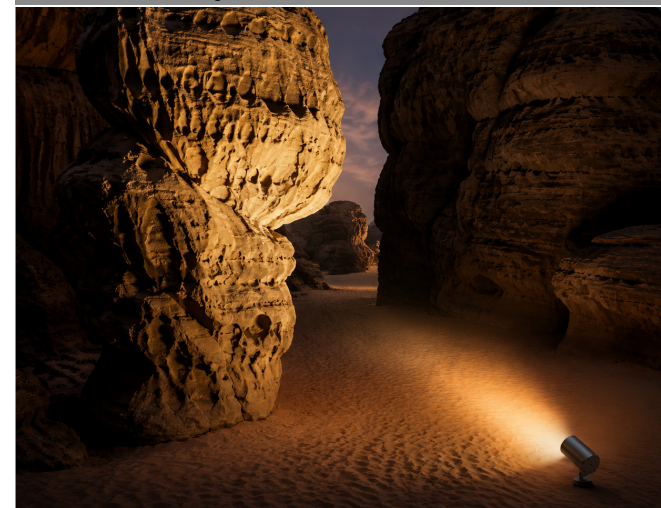

Product Size

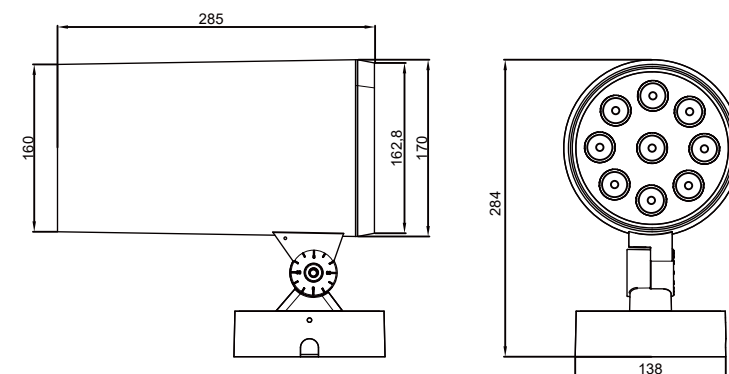

Application

RAIN-7 Floodlight with a seamless 360-degree rotational bracket for permanent installation on a wall, under a ceiling or on a base.

Spike, pole mounted, Tube+ Spike mounting variants available for full on-site adaptability

Product description

Corrosion-resistant & Shinning oil painting-Coastal-environment compatible DC24V, AC85-265V wide-range input, compliant with stringent stability standards.

Elegantly minimal, internally cooled, and engineered for 80W performance.


Multiple control mode available: DMX512/PWM/DALI/CASAMBI Dimming.

Light technique

COB/SMD available, uniformly soft illumination
(LENS Option: 15/24/36/50/10/30/45/60°).

Dust-tight and protection against water jets, IP67/IK08.

Luminaire data, and Installation manual as well as IES format for DIALux are available on the CREGINI website at www.cregini.com.



Lamp

Module connected wattage 80W

Colour temperature 2700-6500K/RGBW

Operation temperature $t_a = -40^{\circ}\text{C} - 50^{\circ}\text{C}$

Ambient temperature $t_a \text{ max} = 50^{\circ}\text{C}$

Service life

LED psu: 50,000h

LED module: 60,000h (L80B50)

100,000h (L70B50)



Address

Address: C T CORPORATION SYSTEM 28
LIBERTY STREET, NEW YORK, NY 10005



Email

Email: sales@cregini.com
Website: www.cregini.com



Phone Call

Phone: +1(224)378-4648