




Product Rendering



Product Size

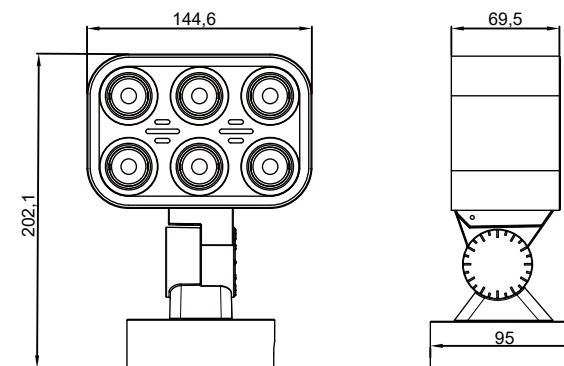

Application

RAYTRON Floodlights with a seamless 360-degree rotational bracket for permanent installation on a wall, under a ceiling or on a base. Suitable for multi-scenario installation and available for the project to ensure the target design outcome is met.


Product description

Distinctive square design, six independent high-power light sources. AC85-265V wide-range input, compliant with stringent stability standards. Customizable finish can seamlessly match architectural façades. Multiple control mode available: DMX512/PWM/DALI/Casambi Dimming.

Light technique

COB/SMD available, uniformly soft illumination (LENS Option: 15/24/36/50/10/30/45/60°). Dust-tight and protection against water jets, IP66.

Luminaire data, and Installation manual as well as IES format for DIALux are available on the CREGINI website at www.cregini.com.



Lamp

Module connected wattage 30W
Colour temperature 2700-6500K
Operation temperature $t_a = -40^{\circ}\text{C} - 50^{\circ}\text{C}$
Ambient temperature $t_a \text{ max} = 50^{\circ}\text{C}$

Service life

LED psu: 50,000h
LED module: 60,000h (L80B50)
100,000h (L70B50)



Address

Address: C T CORPORATION SYSTEM 28
LIBERTY STREET, NEW YORK, NY 10005



Email

Email: Sales@cregini.com
Website: www.cregini.com



Phone Call

Phone: +1(224)378-4648