





Product Rendering

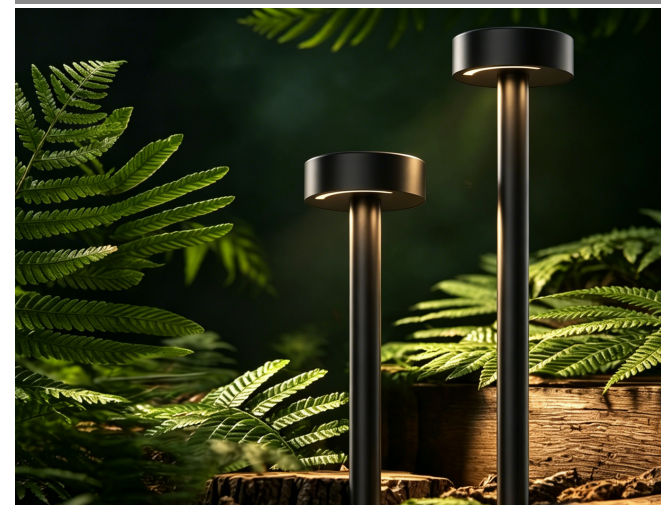

Product Size

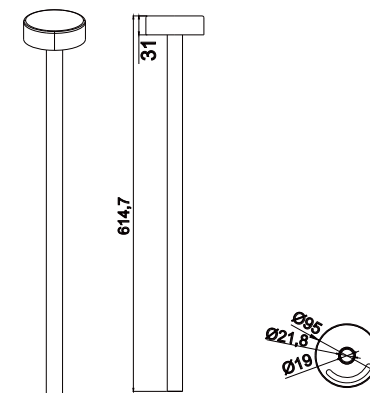

Application

STELA bollard light with various option of base, which suitable for outdoor use for ground and wall installation.
Body and pole with powder coated treatment.

Product description

Optimized optics ensure zero glare perception by pedestrians
Configurable beam: 360° omni/180° asymmetric/custom arc.
Round base / Spike accessories, and height-customizable pole available.
Bespoke finishes available for seamless integration with any environment.

Light technique

Power range 7W ,2700-6500K available
DC24V&AC85-265 version, with universal power input design
Multiple control mode: PWM/TRIAC/DALI Dimming
Dust-tight and protection against water jets, IP65.


Luminaire data , and Installation manual as well as
IES format for DIALux are available on the
CREGINI website at www.cregini.com.

Lamp

Module connected wattage 7W
Colour temperature 2700-6500K
Operation temperature $t_a = -40^{\circ}\text{C} - 50^{\circ}\text{C}$
Ambient temperature $t_a \text{ max} = 50^{\circ}\text{C}$

Service life

LED psu: 50,000h
LED module: 60,000h (L80B50)
100,000h (L70B50)



Address

Address: C T CORPORATION SYSTEM 28
LIBERTY STREET, NEW YORK, NY 10005



Email

Email: sales@cregini.com
Website: www.cregini.com



Phone Call

Phone: +1(224)378-4648