




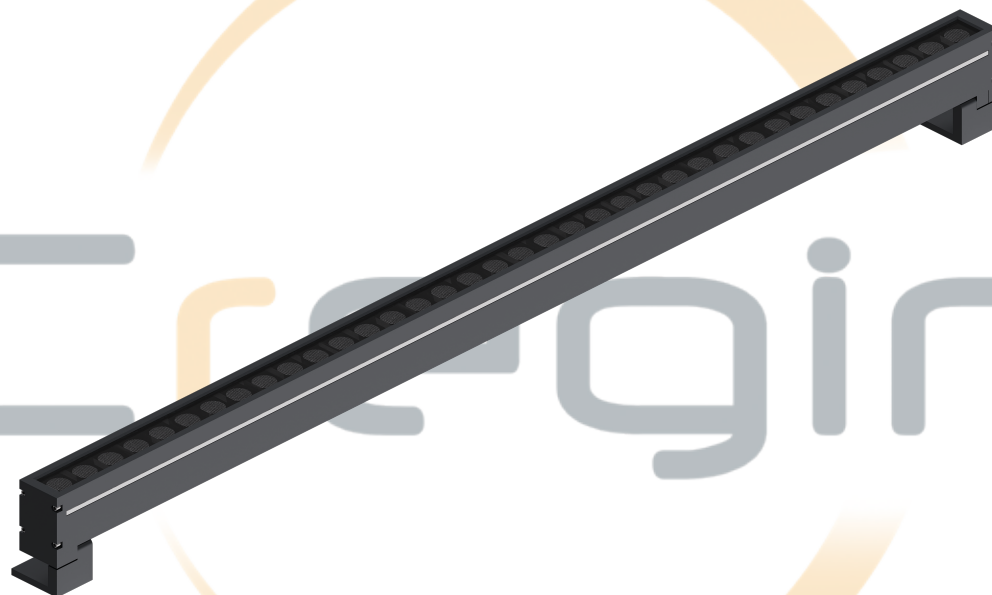

Product Rendering

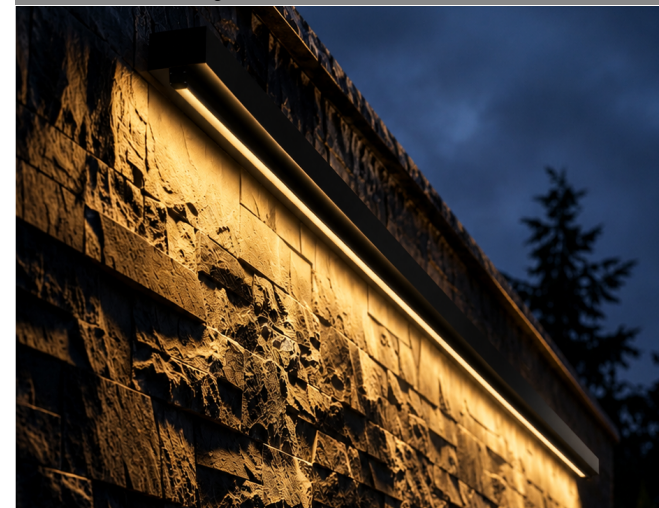

Product Size

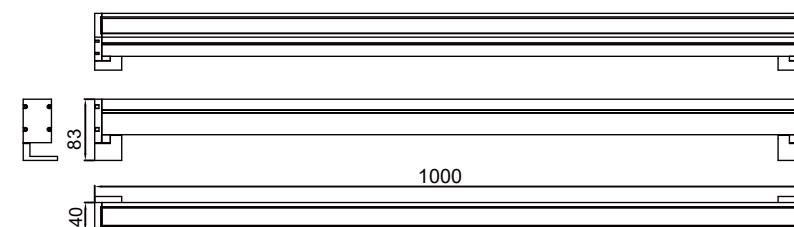

Application

SUPER Linear Grazer light with adjustable mounting brackets for permanent installation surface-mounted.
Customized brackets are also available for the project to ensure the target design outcome is met.


Product description

Structurally waterproof, adhesive-free internally, with full optical integrity
Narrow-beam symmetric/asymmetric variants available for versatile effect
Baffles optional; anti-glare configurations freely selectable
AC85-265V/DC24V is versatile for diverse installation and wiring setups.

Light technique

Power range 36-60W, Mono color/RGB/RGBW/RGBA available
Multiple control mode: DMX512/PWM/TRIAC/DALI Dimming
Aluminium housing, Clear safety glass, Protection class IP 67/IK08.

Luminaire data, and Installation manual as well as IES format for DIALux are available on the CREGINI website at www.cregini.com.



Lamp

Module connected wattage 36/48/60W
Colour temperature 2700-6500K/RGBW
Operation temperature $t_a = -40^{\circ}\text{C} - 50^{\circ}\text{C}$
Ambient temperature $t_a \text{ max} = 50^{\circ}\text{C}$

Service life

LED psu: 50,000h
LED module: 60,000h (L80B50)
100,000h (L70B50)



Address

Address: C T CORPORATION SYSTEM 28
LIBERTY STREET, NEW YORK, NY 10005



Email

Email: sales@cregini.com
Website: www.cregini.com



Phone Call

Phone: +1(224)378-4648